




Freezer containers

RU40 Ultra-low freezer container -60 °C

Robust Cool-Freezing container (40-ft reefer high cube) with a capacity of 63.2 m³. Especially developed for ultra-low temperatures down to -60 °C. The container is provided with an aluminum T-section floor, stainless steel interior and special doors. The standard container does not meet HACCP / GMP requirements. Can optionally be configured with remote monitoring, refrigerated anteroom and lighting.

Technical specifications **RU40**

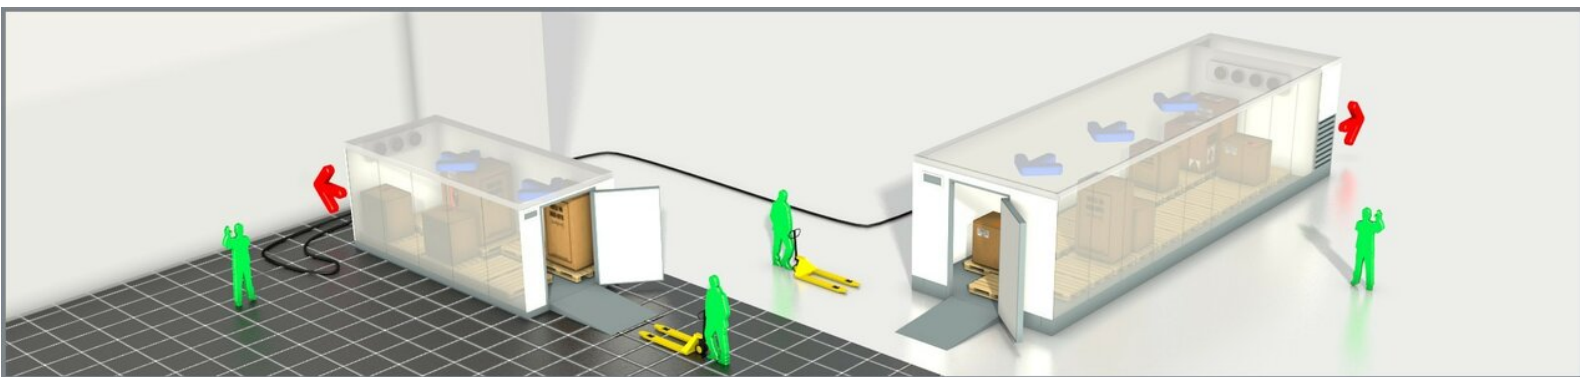

Amount of pallets (euro)	21	Current (nominal) ⁴	26 A	Height (internal) ⁴	2485 mm
Volume ¹	63.2 m ³	Recommended Fuses ⁴	32 A	Door height ⁴	1400 mm
Min. inside temperature ²	-60 °C	Phases ⁴	3 + PE	Door width ⁴	2100 mm
Max. inside temperature ²	-10 °C	Length (external) ⁴	12192 mm	Threshold height ⁴	264 mm
Min. outside temperature ²	-30 °C	Width (external) ⁴	2440 mm	Max. load ⁴	2500 Kg/m ²
Power connection ³	32 A CEE	Height (external) ⁴	2896 mm	Weight ⁴	5890 kg
Voltage ³	400 V	Length (internal) ⁴	11550 mm	Sound level (at 10 m) ⁴	60 dB(A)
Current (max) ⁴	31 A	Width (internal) ⁴	2200 mm		

¹ Without top box 1620 x 780 x 1900

² After approval of Coolworld International

³ Maximum heating capacity 75 kW

⁴ With electrical heating