Coolworld




Chillers

CZ03 Chiller

Air-cooled chiller with 30 kW cooling capacity. This low-energy low-noise machine is ready for use. The machine is mounted in a robust frame with a shock-resistant grid for condenser protection and can be moved easily with a forklift or crane.

Technical specifications CZ03

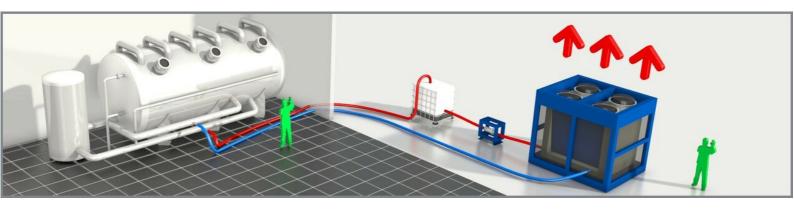

| Cooling capacity ¹ | 30.3 kW | Phases |
|-------------------------------|----------|------------|
| Power consumption | 12.9 kW | Internal p |
| Current (nominal) | 23.5 A | Flow non |
| Power connection | 32 A CEE | Water co |
| Voltage | 400 V | Maximun |
| Recommended Fuses | 32 A | Nominal |
| | | |

| Phases | 3 + N + PE |
|--------------------------|------------|
| Internal pump | Ja/Oui/Ja |
| Flow nominal (L/sec) | 1.2 L/sec |
| Water connection | 2" Bauer |
| Maximum working pressure | 10 bar |
| Nominal pressure drop | 31 kPa |

| Length | 1620 mm |
|-----------------------|----------|
| Width | 1120 mm |
| Height | 2060 mm |
| Weight | 750 kg |
| Sound level (at 10 m) | 42 dB(A) |
| | |

¹ Conforms to Eurovent specifications (cooling water 12/7°C, air 35°C)