




## Chillers

### CZ20i Inverter chiller

Air-cooled chiller with 200 kW cooling capacity. This low-energy low-noise machine is ready for use and inverter driven. The machine is mounted in a robust frame with a shock-resistant grid for condenser protection and can be moved easily with a forklift or crane.

## Technical specifications CZ20i

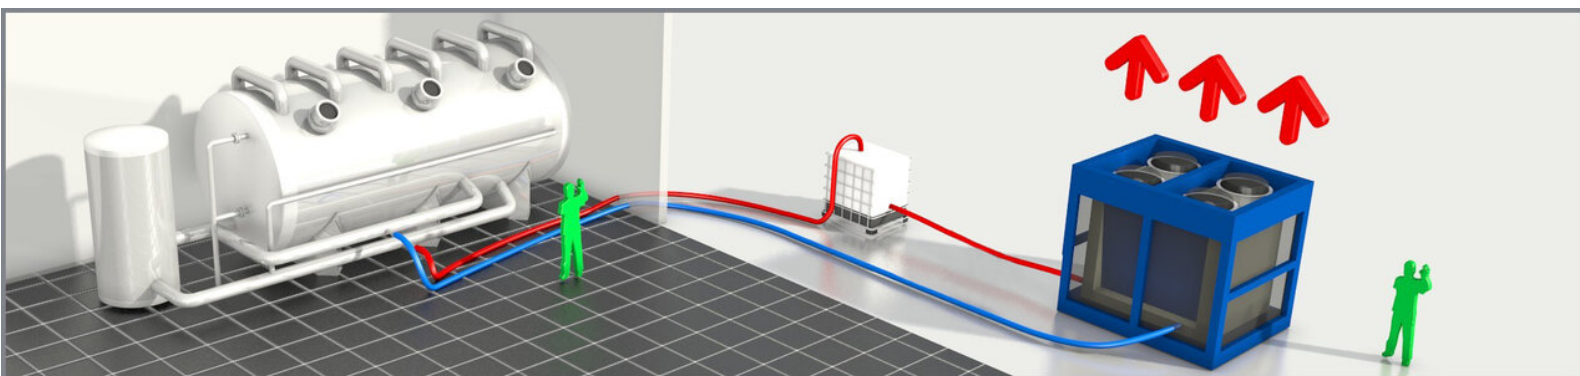

Cooling capacity <sup>1</sup>	200 kW	Phases	3 + PE	Length	2780 mm
Power consumption	70 kW	Internal pump	Nee/Non/Nein	Width	2450 mm
Current (nominal)	117 A	Flow nominal (L/sec)	9.6 L/sec	Height	2680 mm
Power connection	M12	Water connection	2" Bauer	Weight	3300 kg
Voltage	400 V	Maximum working pressure	10 bar	Sound level (at 10 m)	55 dB(A)
Recommended Fuses	160 A	Nominal pressure drop	20.3 kPa		

<sup>1</sup> According to specifications (cooling: water 12 °C/7 °C, air 35 °C)