## Coolworld




Chillers

**CZ17 Chiller** 

Air-cooled chiller with 240 kW cooling capacity, complete with internal water pump and buffer tank. This lowenergy low-noise machine is ready for use. The machine is mounted in a robust frame with a shock-resistant grid for condenser protection and can be moved easily with a forklift or crane.

## Technical specifications CZ17

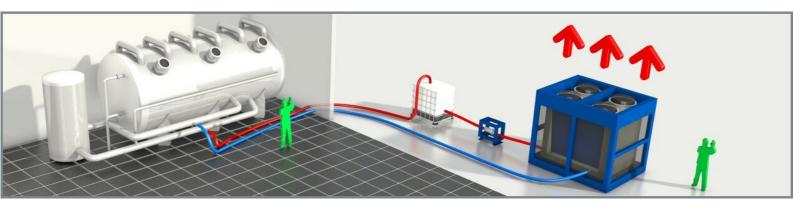

Cooling capacity <sup>1</sup>	170 kW	Phases <sup>2</sup>	3 + A	Length <sup>2</sup>	4500 mm
Power consumption <sup>1</sup>	64.9 kW	Internal pump <sup>2</sup>	Nee	Height <sup>3</sup>	2520 mm
Current (nominal) 1	109 A	Water connection <sup>2</sup>	4" Bauer	Weight <sup>2</sup>	2575 kg
Power connection <sup>2</sup>	M10 bout	Maximum working pressure	<sup>2</sup> 10 bar	Sound level (at 10 m) <sup>2</sup>	59.5 dB(A)
Voltage <sup>2</sup>	400 V	Nominal pressure drop <sup>2</sup>	24.8 kPa	Flow nominal (L/sec) <sup>2</sup>	8.2 L/sec
Recommended fuses <sup>2</sup>	160 A	Width <sup>3</sup>	1170 mm		

 $<sup>^{1}</sup>$  According to Eurovent specifications (cooling: water 12 °C/7 °C, air 35 °C)

<sup>&</sup>lt;sup>2</sup> When additional reheating is utilised

<sup>&</sup>lt;sup>3</sup> Without top box 1620 x 780 x 1820