




## Freezer rooms

### VC03 Freezer unit

Ready-for-use mobile freezer unit with a volume of 30 m<sup>3</sup> and a large freezing overcapacity (temperature range down to minus 30 °C). The frozen storage cell has been fitted with a flat anti-skid floor, lighting, a door with frame heating that opens smoothly (also from the inside), and has a very low entry height. The frozen storage cell meets the HACCP/GMP requirements and is easy to install, even in locations that are difficult to reach, as well indoors as outdoors. The storage cell is low noise and low power.

### Technical specifications VC03

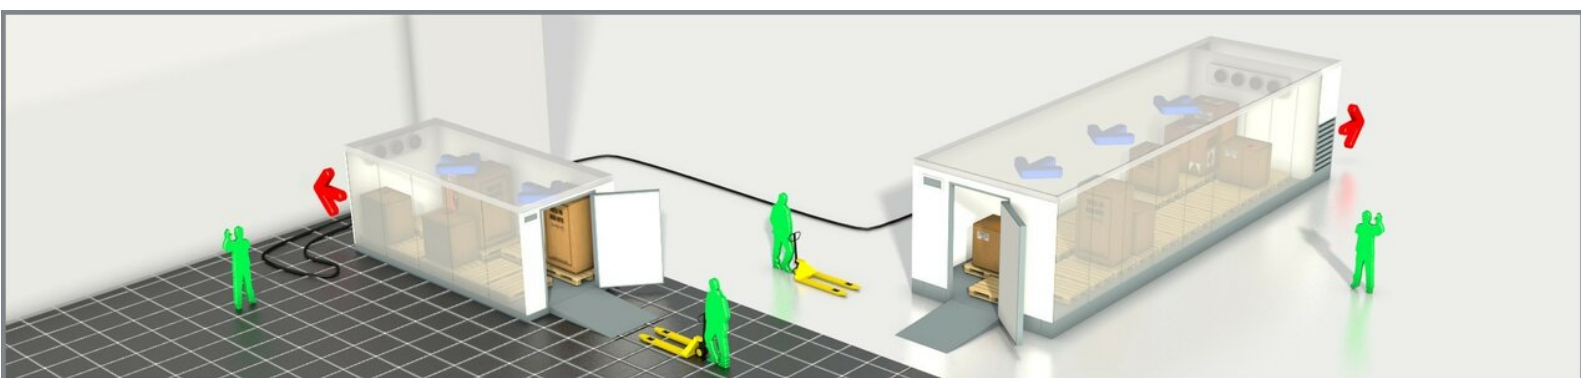

|                          |                   |                   |            |                       |                       |
|--------------------------|-------------------|-------------------|------------|-----------------------|-----------------------|
| Amount of pallets (euro) | 3                 | Current (nominal) | 3.64 A     | Height (internal)     | 2260 mm               |
| Volume                   | 10 m <sup>3</sup> | Recommended fuses | 16 A       | Door height           | 2100 mm               |
| Min. inside temperature  | -25 °C            | Phases            | 3 + N + PE | Door width            | 900 mm                |
| Max. inside temperature  | -15 °C            | Length (external) | 2000 mm    | Threshold height      | 160 mm                |
| Min. outside temperature | -20 °C            | Width (external)  | 2500 mm    | Max. load             | 420 Kg/m <sup>2</sup> |
| Power connection         | 16 A CEE          | Height (external) | 2500 mm    | Weight                | 850 kg                |
| Voltage                  | 400 V             | Length (internal) | 1840 mm    | Sound level (at 10 m) | 47 dB(A)              |
| Current (max)            | 5.43 A            | Width (internal)  | 2340 mm    |                       |                       |