




Freezer rooms

VC04 Freezer unit

Ready-for-use mobile freezer unit with a volume of 20 m³ and a large freezing overcapacity (temperature range down to minus 30 °C*). The frozen storage cell has been fitted with a flat anti-skid floor, lighting, a door with frame heating that opens smoothly (also from the inside), and has a very low entry height. The frozen storage cell meets the HACCP/GMP requirements and is easy to install, even in locations that are difficult to reach, as well indoors as outdoors. The storage cell is low noise and low power.

Technical specifications VC04

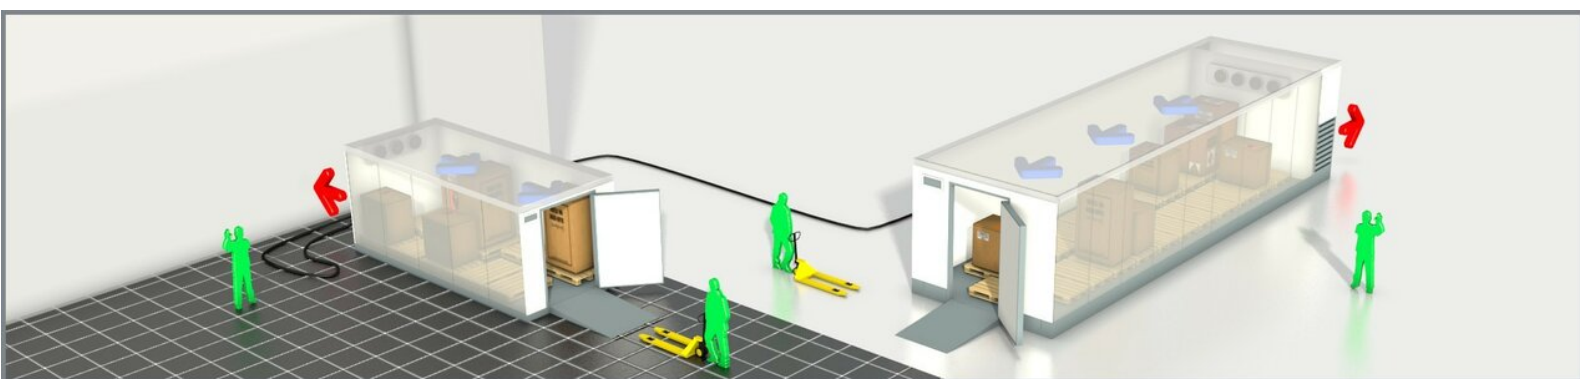

Amount of pallets (euro)	5	Current (nominal)	4.8 A	Height (internal)	2260 mm
Volume	20 m ³	Recommended fuses	16 A	Door height	2100 mm
Min. inside temperature ¹	-30 °C	Phases	3 + N + PE	Door width	900 mm
Max. inside temperature	-15 °C	Length (external)	4000 mm	Threshold height	160 mm
Min. outside temperature	-20 °C	Width (external)	2500 mm	Max. load	420 Kg/m ²
Power connection	16 A CEE	Height (external)	2500 mm	Weight	1350 kg
Voltage	400 V	Length (internal)	3840 mm	Sound level (at 10 m)	48 dB(A)
Current (max)	6.9 A	Width (internal)	2340 mm		

¹ After approval of Coolworld International