




## Freezer rooms

### VC05 Freezer unit

Ready-for-use mobile freezer unit with a volume of 30 m<sup>3</sup> and a large freezing overcapacity (temperature range down to minus 30 °C\*). The frozen storage cell has been fitted with a flat anti-skid floor, lighting, a door with frame heating that opens smoothly (also from the inside), and has a very low entry height. The frozen storage cell meets the HACCP/GMP requirements and is easy to install, even in locations that are difficult to reach, as well indoors as outdoors. The storage cell is low noise and low power.

## Technical specifications VC05

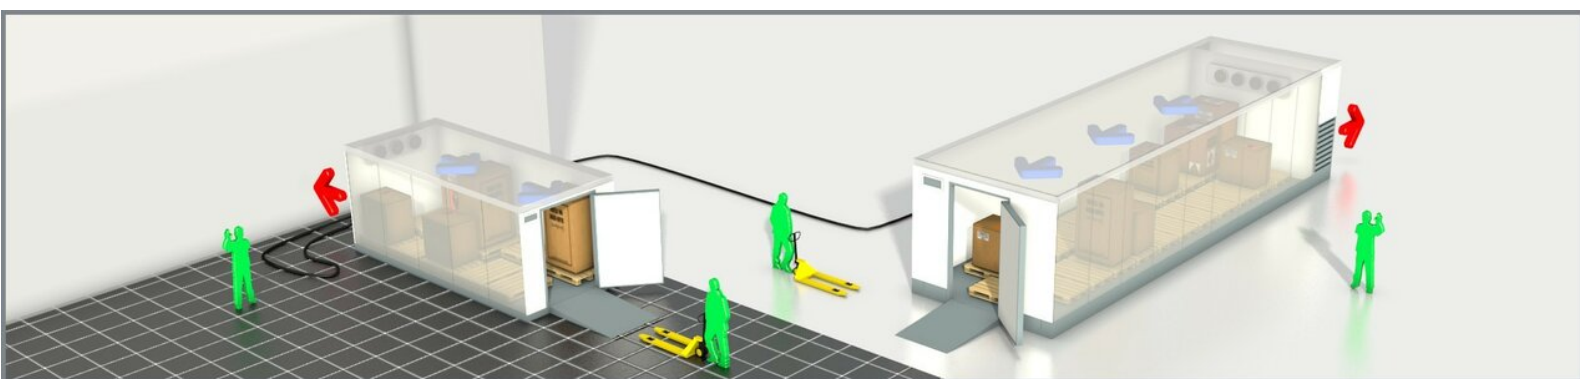

Amount of pallets (euro)	10	Current (max)	9.4 A	Height (internal)	2260 mm
Volume	30 m <sup>3</sup>	Recommended fuses	16 A	Door height	2100 mm
Min. inside temperature <sup>1</sup>	-30 °C	Phases	3 + N + PE	Door width	1400 mm
Max. inside temperature	-15 °C	Length (external)	6000 mm	Threshold height	180 mm
Min. outside temperature	-20 °C	Width (external)	2500 mm	Max. load	1200 Kg/m <sup>2</sup>
Power connection	16 A CEE	Height (external)	2500 mm	Weight	1750 kg
Voltage	400 V	Length (internal)	5840 mm	Sound level (at 10 m)	47 dB(A)
Current (nominal)	5.3 A	Width (internal)	2340 mm		

<sup>1</sup> After approval of Coolworld International