
## Coolw®rld



Chillers
CZ30 Chiller

Air-cooled chiller with 300 kW cooling capacity. This low-energy low-noise machine is ready for use. The machine is mounted in a robust frame with a shock-resistant grid for condenser protection and can be moved easily with a forklift or crane.

## Technical specifications CZ30

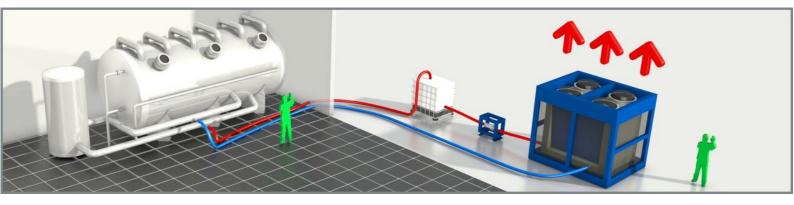

Cooling capacity <sup>1</sup>	317 kW	Phases	3 + PE	Width	2500 mm
Power consumption	121 kW	Internal pump	Nee/Non/Nein	Height	2670 mm
Current (nominal)	219 A	Water connection	4" Bauer	Weight	4505 kg
Power connection	M12	Maximum working pressu	ıre 10 bar	Sound level (at 10 m)	60 dB(A)
Voltage	400 V	Nominal pressure drop	71.4 kPa	Flow nominal (L/sec)	15.6 L/sec
<b>Recommended Fuses</b>	315 A	Length	5200 mm		

<sup>1</sup> Air outside 35 °C, exit 27 °C