




Airhandler low temp LU05L

Water-cooled ventilation unit with a 50 kW cooling capacity, fitted with a ventilation control. The frequency controlled unit has a defrost device, making it suitable for low-temperature applications as well. This system can also be used as a heater (capacity: 29 kW). This low temp airhandler is ready for use and easy to install with its quick-connectors. The unit is easy to move with a pallet cart or forklift.

Technical specifications LU05L

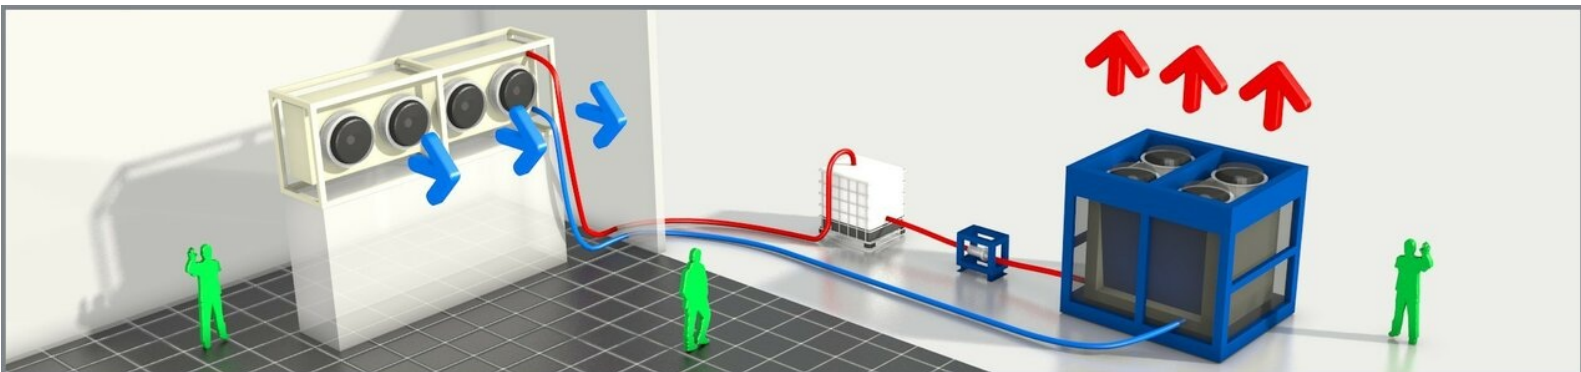

Cooling capacity	50 kW
Heating capacity	29.4-14.7 kW
Current (nominal)	16 A
Capacity steps	Freq. contr.
Max. air flow	52000 m ³ /h
Voltage	400 V

External (Air) pressure	130 Pa
Power connection	16/63 A CEE
Recommended fuses	16/63 A
Phases	3 + PE
Water connection	2" Bauer
Length	4900 mm

Width	1200 mm
Height	1750 mm
Weight	1600 kg
Sound level (at 10 m)	60 dB(A)

No rights can be derived from this information. For current technical specifications, please contact a Coolworld specialist.