




## Cold stores

### **MK03 Cold storage cell**

Ready-for-use mobile cold storage cell with a volume of 84 m<sup>3</sup> and a large refrigeration capacity (overcapacity). The cold storage cell has been fitted with a flat anti-skid floor, lighting, a door with frame heating that opens smoothly (also from the inside), and has a very low entry height. The cold storage cell meets the HACCP/GMP requirements, and standard features include a data log system. The unit is easy to install with a crane truck. The storage cell is low noise and low power.

## Technical specifications **MK03**

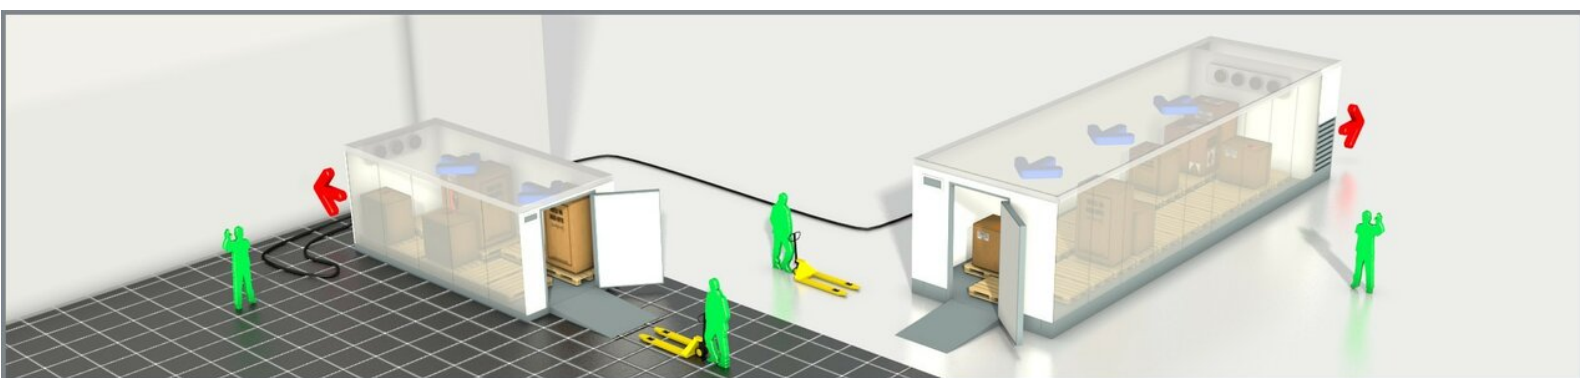

Amount of pallets (euro)	28	Length (external)	12000 mm	Min. outside temperature	-20 °C
Volume	100 m <sup>3</sup>	Width (external)	3500 mm	Current (max)	7.8 A
Min. inside temperature	-2 °C	Height (external)	3000 mm	Current (nominal)	6.9 A
Max. inside temperature	10 °C	Door height	2500 mm	Length (internal)	10500 mm
Power connection	16 A CEE	Door width	1400 mm	Width (internal)	3300 mm
Voltage	400 V	Threshold height	200 mm	Height (internal)	2700 mm
Recommended fuses	16 A	Weight	6000 kg	Max. load	1200 Kg/m <sup>2</sup>
Phases	3 + N + PE	Sound level (at 10 m)	50 dB(A)		