


Indirect fired Heater HT20

Low noise indirect oil fired heater with a heating capacity of 200 kW. This low-energy machine is ready for use. The machine is mounted in a robust frame and can be moved easily with a forklift or crane.



Standard accessories HT20

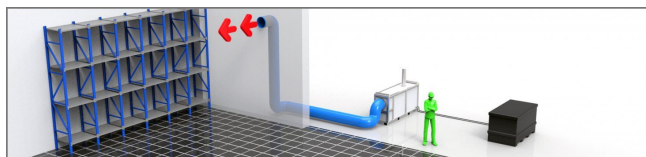

Electrical power connection (A)

Optional accessories HT20



Airhoses

Technical specifications HT20

Heating capacity	200 kW
Nominal air flow	12000 m ³ /h
Voltage	400 V
Recommended Fuses	16 A
Power connection	16 A CEE
Fuel type	Diesel
Sound level (at 10 m)	56 dB(A)
Dimensions (LxWxH)	3000x810x1360 mm
Weight	605 Kg