



## Freezer unit MI01

Representative, low-energy and low-noise cell constructed in accordance with HACCP & GMP requirements, with a volume of 25 m<sup>3</sup>. Especially developed for shock freezing / blast chilling of products. Ready for use and easy to install with a crane truck, even in locations that are difficult to reach. Can be used both outdoors and indoors. Uses ozone-friendly cooling agent. Accessible via door that can also be opened from the inside. Including lighting.



### Standard accessories MI01



Lighting

Anti-skid floor

Door edge heating

Strip curtain




Light alarm / sound

Data logger

Anti theft

### Optional accessories MI01

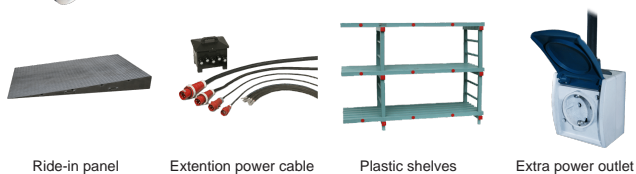

Ride-in panel

Extension power cable

Plastic shelves

Extra power outlet



SMS alarm



Elevation on brackets



Remote monitoring

### Technical specifications MI01

Amount of pallets (euro)	10
Volume	25 m <sup>3</sup>
Min. inside temperature <sup>1</sup>	-35 °C
Max. inside temperature	5 °C
Power connection	63 A CEE
Voltage	400 V
Recommended fuses	63 A
Phases	3 + N + E
Length (external)	6450 mm
Width (external)	2950 mm
Height (external)	2930 mm
Door height	2100 mm
Door width	1400 mm
Threshold height	180 mm
Weight	3100 kg
Sound level (at 10 m)	59 dB(A)

<sup>1</sup> After approval of Coolworld International