




Industrial boilers

OG600C Industrial boiler

Gas- or diesel-fired mobile boiler room with a heating capacity of 600 kW installed in a robust steel heating container. The powerful and compact unit is easy to install, also in hard to reach locations. The mobile industrial boilers provide water temperatures of up to 90 °C and pressures of up to 6 bar. The efficient boiler features various safety facilities, frost protection, low NOx burners, smart control technology and has the lowest emissions, energy consumption and noise levels in the European market

Technical specifications **OG600C**

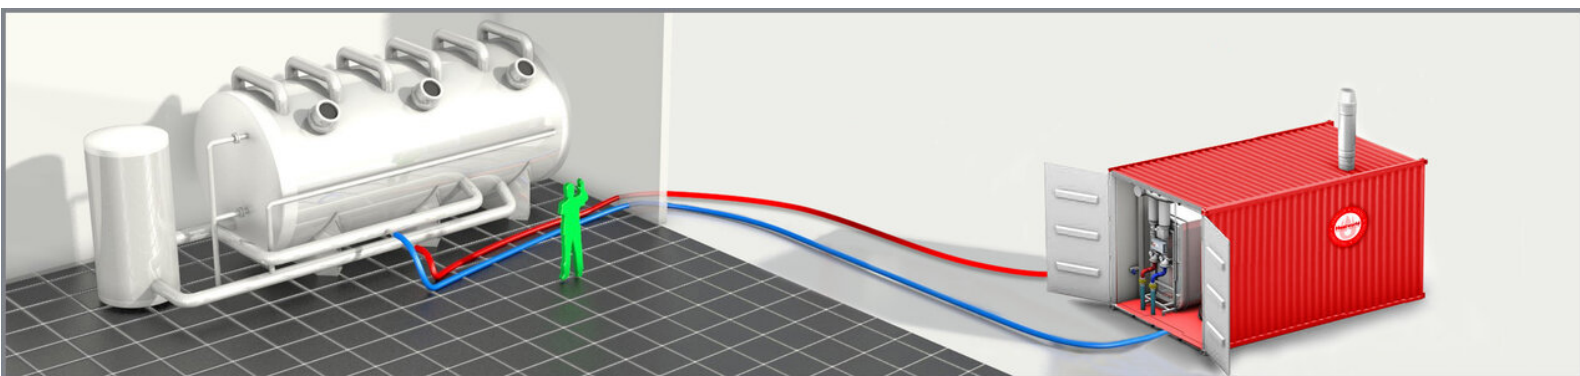

| | | | | | |
|-------------------|--------------------------|-------------------------------|---------------|-------------------------------|-----------------------|
| Heating capacity | 600 kW | Oil tank double-wall | Optioneel | Consumption - gas - full load | 74 m ³ /h |
| Voltage | 400 V | Volume expansion vessel | 360 l | Length | 4550 mm |
| Power connection | 32 A CEE | Recommended working pressure | 1.6 - 3.0 bar | Width | 2450 mm |
| Temperature range | 50 - 90 °C | Safety valve | 6.0 bar | Height | 2770 mm |
| Internal pump | 26.5 m ³ /h | Fuel types | Gas / Diesel | Dimensions (LxWxH) | 6058 x 2438 x 2735 mm |
| Controller | Digitaal/Digital/Digital | Low NOx class | 3 | Weight | 5500 kg |
| Water connection | 4" Bauer | Consumption - oil - full load | 55 kg/h | | |